



# Preheat T8

## F15T8/CW 25PK

Philips leads the industry with the lowest level mercury technology. Reducing the mercury level (source reduction) during the manufacturing phase is essential to creating products that are less harmful to the environment.

### Warnings and Safety

- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Features	ALTO® (ALTO)
Life to 50% Failures (Nom)	13,000 hour(s)

Light Technical	
Color Code	33-640
Luminous Flux	830 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4100 K
Color rendering index (CRI)	63

Operating and Electrical	
Power Consumption	15 W
Lamp Current (Nom)	0.335 A
Wattage Equivalent	15 W
Voltage (Nom)	55 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Shape	T8
Net Weight (Piece)	0.131 lb


Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg

Product Data	
Order product name	F15T8/CW 25PK
Full product name	F15T8/CW 25PK
Order code	407197
Material Nr. (12NC)	928022803325
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677367206
Numerator - Packs per outer box	25
EAN/UPC - Case	50046677407198


# Preheat T8

## Dimensional drawing

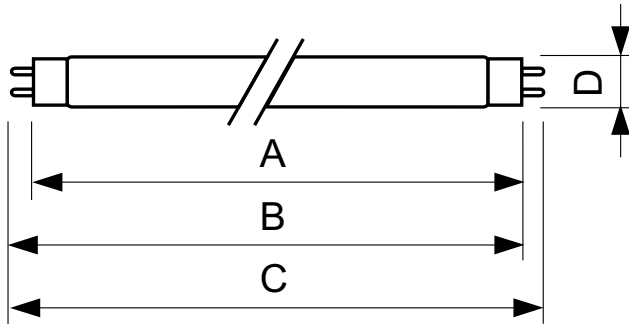


Product	D (max)	A (max)	B (max)	B (min)	C (max)
F15T8/CW 25PK	1-1/8 inch	17-1/4 inch	17-1/2 inch	17-7/16 inch	17-13/16 inch

## Photometric data

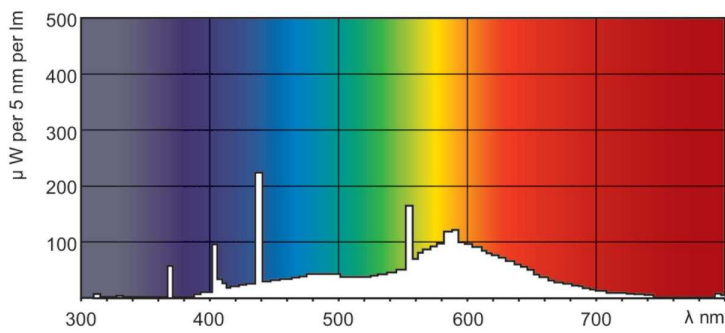


Spectral Power Distribution Colour - F15T8/CW 25PK

## Lifetime

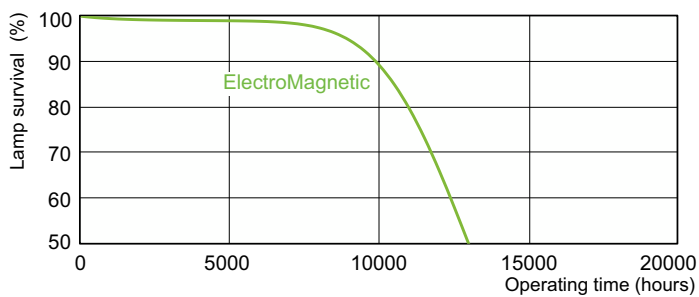


Life expectancy diagram - 3 hour cycle

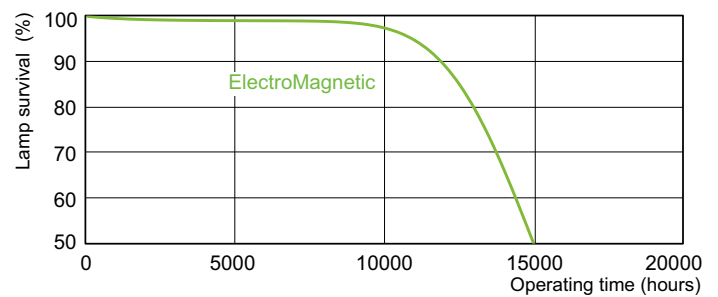

Life expectancy diagram - 12 hour cycle

## Preheat T8

### Lifetime

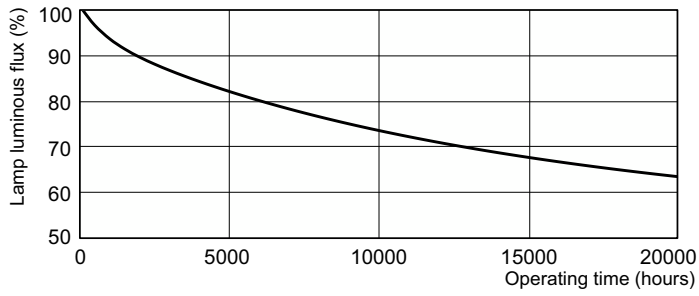

Lumen Maintenance Diagram - F15T8/CW 25PK

